

Performance Plus+


Tile Dry Verge System - Standard

Product Information

The Kytun Performance Plus Continuous Tile Dry Verge System - Standard permanently secures tiles on gable ends and gives an attractive maintenance free finish to the roofline. It provides a neat, continuous and totally weatherproof finish to the gable.

The components are manufactured from high grade pre-primed polyester coated aluminium or plastisol coated galvanised steel which produces textured finish.

Performance Plus+ Tile Dry Verge System - Standard

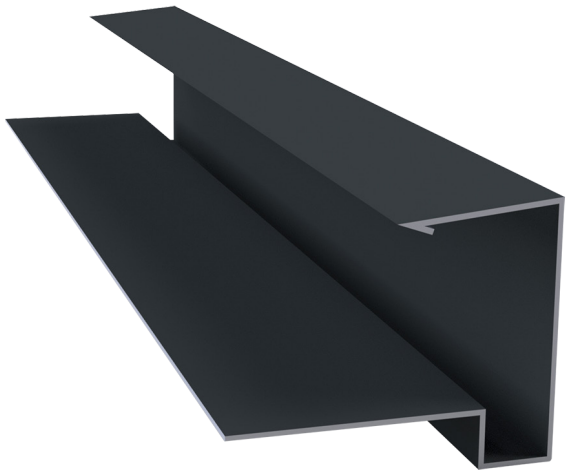

Product Features


- Provides full wind uplift and rain protection.
- Integrated drainage channel directs rainwater into the eaves gutter.
- Extremely easy and quick to install.
- Requires no maintenance once installed.
- Can be fully customised.
- Extensive range of colours available.

Dimensions

C08/C08S/C08L Tile Dry Verge: Aluminium


Overall length: 3000mm

Code	Size	Colour	Pk Qty
C08S	50mm x 3m	Blk • Blue/Blk	4
C08	65mm x 3m	Blk • Blue/Blk	4
C08L	85mm x 3m	Blk • Blue/Blk	4
C08JS	50mm (Jointer)	Blk • Blue/Blk	1
C08J	65mm (Jointer)	Blk • Blue/Blk	1
C08JL	85mm (Jointer)	Blk • Blue/Blk	1

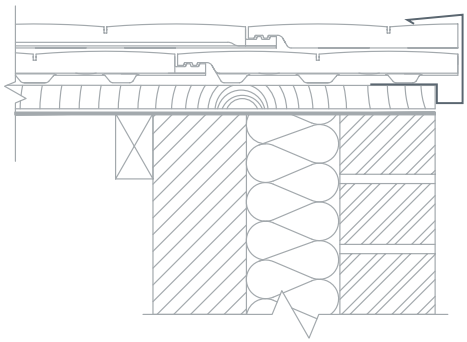


Aluminium
Polyester Coated


C08 Tile Dry Verge also available in Galvanised Steel

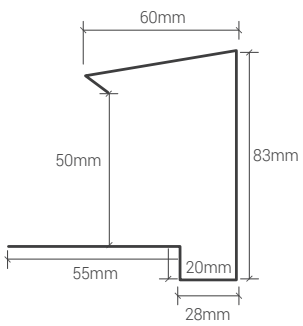

50mm version



65mm version

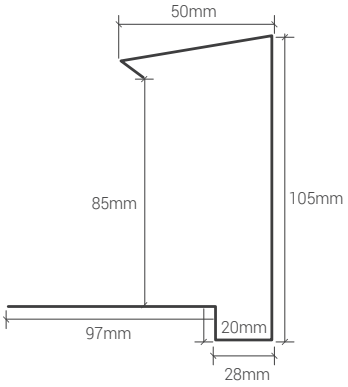

85mm version

Performance Plus+

Tile Dry Verge System - Standard



Fig 1a.

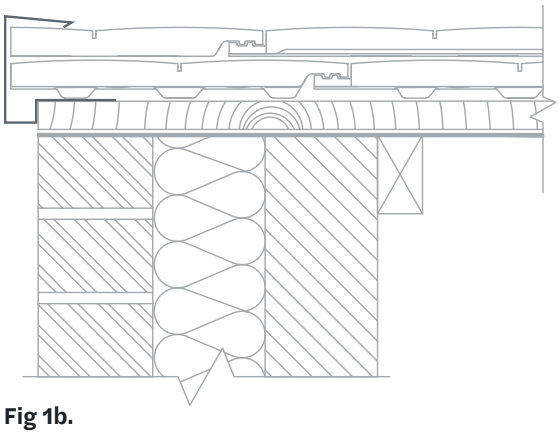


Fig 1b.

1. The underlay and battens are to be laid and cut flush with outer edge of gable wall or bargeboard. (Fig.1a & Fig.1b). The gutter position should be set up to allow the verge trim channel to run into it.
2. Position the verge trim on top of the battens and align against the batten ends with the drip outside the batten end (Fig.1b). Allow for construction detail. Ensure the C08 is fixed at every batten with 40mm long galvanised clout nail (Fig.2).
3. The internal jointer system is then slid into the trim already fixed on the roof. The next piece of trim is slid over this and fixed into place as per step 2 (Fig.3a & Fig.3b). This is then repeated for the remainder of the verge. A low modulus mastic sealant should then be ran over every joint to ensure a water-tight joint.



Fig 2.

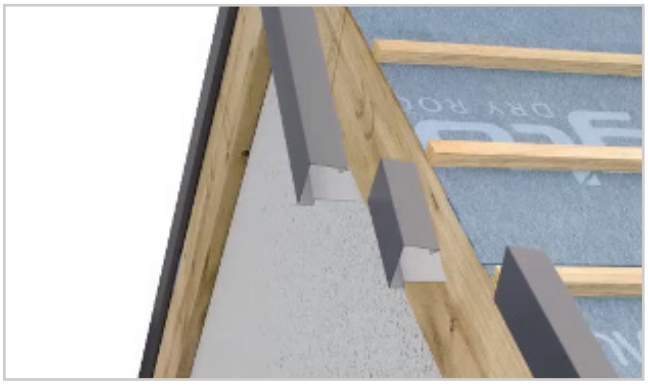


Fig 3a.



Fig 3b.

Performance Plus+

Tile Dry Verge System - Standard

4. At the Ridge apex after measuring plumb, cut the Kytun Tile Dry Verge to meet each other.
5. Fix roofing tiles as per manufacturer's instructions. Some nibs may need to be removed to fit around KYTUN C08 Tile Dry Verge. (Fig.4)



Fig 4.

Kytun

IRL (Head Office)
Keenaghan
Kilmacrenan
Letterkenny, Co. Donegal
F92 DW64
T: +353 (0) 74 91 39500
E: info@kytun.com

UK (Manufacturing Centre)
Senhouse Road
Darlington
Durham
DL1 4YB
T: +44 (0) 168 429 3702
E: info@kytun.com