


Lead Chimney Tray

Product Code:

LCT01 Single Lead Chimney Tray

LCT02 Double Lead Chimney Tray

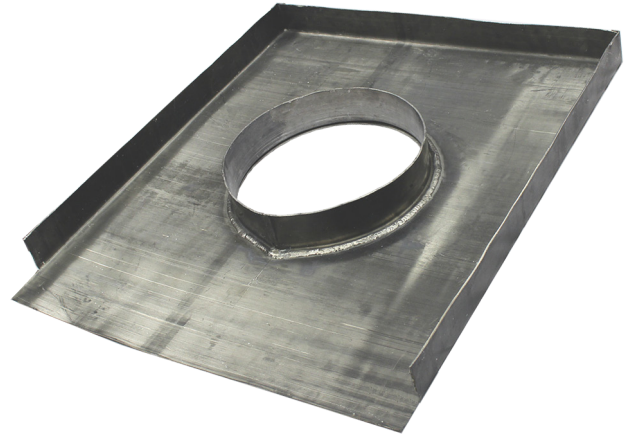

Our Lead Chimney Trays are designed to prevent water penetration into the building through the chimney stack. Lead Chimney Trays are fitted during the construction of the chimney.

Kytun Lead Chimney Trays come in single and double sizes. If you can't see the Tray you require please contact us with your requirements and we will quickly get back to you with a bespoke solution to your needs. We can produce any size.

Features & Benefits

- Designed to collect water that penetrates the chimney.
- Suitable for new build or refurbishment work.
- Made from code 4 lead, a material with proven characteristics to perform at the highest level in one of the most vulnerable parts of the building.

Uses

- For brick or block chimney stacks.
- To stop water entering the building around a chimney.
- Where the chimney penetrates a pitched roof.
- Complies with current Building Regulation requirements.

Installation

- Regardless of the location of the chimney on the roof, the lead tray should be installed minimum of 150mm above the lowest points of intersection with the roof.
- The tray should be bedded on a thin layer of mortar. The front section of tray is then folded down over the Kytun Lead Chimney Apron or other cover flashing.
- We recommend that our Chimney Tray is used in conjunction with our Chimney Apron range (available separately).

Quality Standards & Certification



Stepped flashings as required (supplied by others)

Steeper pitched roofs and/or larger chimneys may require a 2nd chimney tray above the rear apron flashing

